




Product Service

# CERTIFICATE

No. Z2 073899 0080 Rev. 00

**Holder of Certificate:** **ZNSHINE PV-TECH Co., Ltd.**  
No.1, South Zhenxing Road  
Industrial Zone, Zhixi Town, Jintan District  
213251 Changzhou City, Jiangsu Province  
PEOPLE'S REPUBLIC OF CHINA

## Certification Mark:

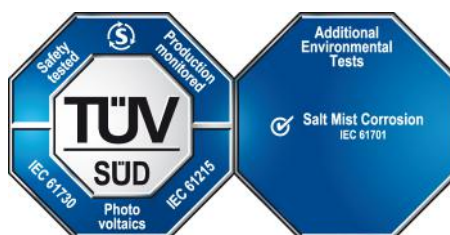

**Product:** **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**  
**Mono-Crystalline Silicon Photovoltaic Module**

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: [www.tuvsud.com/ps-cert](http://www.tuvsud.com/ps-cert)

**Test report no.:** 704061908310-00

**Valid until:** 2025-07-22

**Date,** 2020-07-27

( Zhulin Zhang )

# CERTIFICATE

No. Z2 073899 0080 Rev. 00

## Model(s):

ZXM6-78-xxx/M, xxx = 400 to 430 in steps of 5;  
 ZXM6-72-xxx/M, xxx = 355 to 400 in steps of 5;  
 ZXM6-66-xxx/M, xxx = 340 to 365 in steps of 5;  
 ZXM6-60-xxx/M, xxx = 295 to 330 in steps of 5;  
 ZXM6-NH156-xxx/M, xxx = 455 to 485 in steps of 5;  
 ZXM6-NP156-xxx/M, xxx = 455 to 485 in steps of 5;  
 ZXM6-NO156-xxx/M, xxx = 455 to 485 in steps of 5;  
 ZXM6-NH144-xxx/M, xxx = 420 to 450 in steps of 5;  
 ZXM6-NP144-xxx/M, xxx = 420 to 450 in steps of 5;  
 ZXM6-NO144-xxx/M, xxx = 420 to 450 in steps of 5;  
 ZXM6-NH132-xxx/M, xxx = 385 to 410 in steps of 5;  
 ZXM6-NP132-xxx/M, xxx = 385 to 410 in steps of 5;  
 ZXM6-NO132-xxx/M, xxx = 385 to 410 in steps of 5;  
 ZXM6-NH120-xxx/M, xxx = 350 to 375 in steps of 5;  
 ZXM6-NP120-xxx/M, xxx = 350 to 375 in steps of 5;  
 ZXM6-NO120-xxx/M, xxx = 350 to 375 in steps of 5;  
 ZXM6-NH156-xxx/M, xxx = 420 to 440 in steps of 5;  
 ZXM6-NP156-xxx/M, xxx = 420 to 440 in steps of 5;  
 ZXM6-NO156-xxx/M, xxx = 420 to 440 in steps of 5;  
 ZXM6-NH144-xxx/M, xxx = 390 to 410 in steps of 5;  
 ZXM6-NP144-xxx/M, xxx = 390 to 410 in steps of 5;  
 ZXM6-NO144-xxx/M, xxx = 390 to 410 in steps of 5;  
 ZXM6-NH132-xxx/M, xxx = 355 to 375 in steps of 5;  
 ZXM6-NP132-xxx/M, xxx = 355 to 375 in steps of 5;  
 ZXM6-NO132-xxx/M, xxx = 355 to 375 in steps of 5;  
 ZXM6-NH120-xxx/M, xxx = 325 to 340 in steps of 5;  
 ZXM6-NP120-xxx/M, xxx = 325 to 340 in steps of 5;  
 ZXM6-NO120-xxx/M, xxx = 325 to 340 in steps of 5;  
 ZXM6-H156-xxx/M, xxx = 415 to 435 in steps of 5;  
 ZXM6-P156-xxx/M, xxx = 415 to 435 in steps of 5;  
 ZXM6-H144-xxx/M, xxx = 380 to 405 in steps of 5;  
 ZXM6-P144-xxx/M, xxx = 380 to 405 in steps of 5;  
 ZXM6-H132-xxx/M, xxx = 355 to 370 in steps of 5;  
 ZXM6-P132-xxx/M, xxx = 355 to 370 in steps of 5;  
 ZXM6-H120-xxx/M, xxx = 320 to 335 in steps of 5;  
 ZXM6-P120-xxx/M, xxx = 320 to 335 in steps of 5.  
 xxx is standing for rated output power at STC

## Parameters:

Construction:	Framed, with Junction box, Cable and Connectors.
Safety Class:	Class II
Maximum System Voltage:	1500 V DC
Fire Safety Class:	Class C according to UL790
Severity of Salt mist test:	Severity 6

## Tested according to:

IEC 61215-1:2016  
 IEC 61215-1-1:2016  
 IEC 61215-2:2016  
 IEC 61730-1:2016  
 IEC 61730-2:2016  
 IEC 61701:2011

## Production Facility(ies):

073899